

1 Features and Benefits

- △ Digital output, bipolar latch
- △ Stable over the entire temperature range
- △ Wide operating voltage range: 4.5V ~ 24V
- △ Strong resistance to mechanical stress
- △ Reverse power supply protection
- △ Non-contact output, safety and reliable
- △ TO-92UA, SOT-23-3L and SOT-89 package options
- △ Developed according to the EU RoHS and REACH

2 Application Examples

- △ Automotive electronics, Consumer electronics and Industrial electronics
- △ Water flow sensing
- △ Electronic steering column lock
- △ Door latch system
- △ Seat adjustment
- △ Speed measurement and tachometer
- △ Motor control
- △ Brushless DC motor


3 Selection Guide

Part Number	Packing	Mounting	Operating, ΔT	B_{RP} (Min)	B_{OP} (Max)
PS1103041 /K-M	7-in. reel, 3000 pieces/reel	3-pin SOT23-3L surface mount	-40°C to 125°C	8.0mT	-8.0mT
PS1103041 /L-UA	Anti-static bag, 1000 pieces/bag	3-pin SIP through hole	-40°C to 150°C	-8.0mT	8.0mT
PS1103041 /L-S	7-in. reel, 1000 pieces/reel	3-pin SOT89 surface mount	-40°C to 150°C	-8.0mT	8.0mT

NOTE 1. Hall ICs are soldered tin brazing for assembly, and wave soldering of SOT-23-3L and SOT-89 surface-mounted components poses a risk of failure.

2. A risk of circuit failure may happen in non-brazing processes such as electric resistance welding, high-frequency welding, etc.

3. E: -40~85°C; K: -40~125°C; L: -40~150°C.



SOT-23-3L
(Type M)




SOT-89
(Type S)




TO-92UA
(Type UA)

4 General Description

The PS1103041 is a digital bipolar-latch Hall IC with single output. It has good temperature stability and latch function. The PS1103041 Hall-effect sensor includes the following on a single silicon chip: reverse voltage protector, voltage regulator, temperature compensation circuit, Hall-voltage generator, signal amplifier, Schmitt trigger and open collector output driver, etc. The integrated voltage regulator and temperature compensation circuit ensure that the sensor works stably in a wide voltage and temperature range. The reverse voltage protection circuit prevents the sensor from being damaged by reverse voltage. The PS1103041, produced with bipolar technology, is more stable and reliable in some special application. It is available in three package types: SOT-23-3L (Type M), SOT-89 (Type S), and TO-92UA (Type UA). Each package is lead (Pb) free, with 100% matte tin plated leadframes.

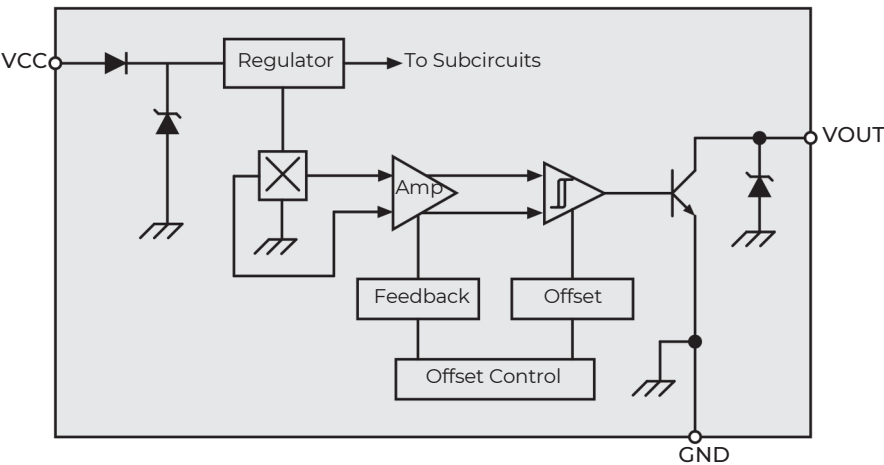

5 Terminal List

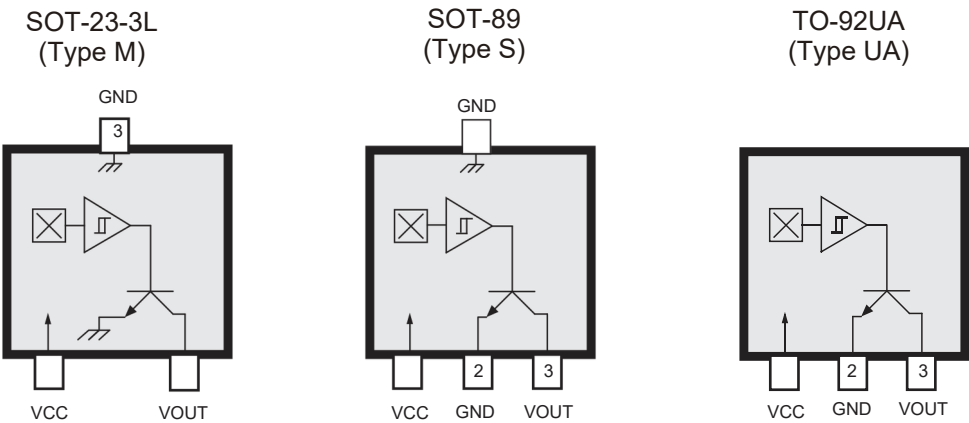

Name	Description	Number		
		Type M	Type S	Type UA
VCC	Power Supply	1	1	1
GND	Ground	3	2	2
VOUT	Output	2	3	3

6 Absolute Maximum Ratings

Characteristic	Symbol	Note	Rating	Unit
Supply Voltage Reverse Supply	V_{CC}		28	V
Voltage Output Off Voltage	V_{ACC}		-22	V
Reverse Output Voltage Output	V_{OUT}		28	V
Current Magnetic Flux Density	V_{ROUT}		-0.5	V
Operating Temperature	$I_{OUTSINK}$		50	mA
Operating Temperature	B		Unlimited	G
Maximum Junction Temperature	TA	L	-40 to 150	°C
Storage Temperature	TA	K	-40 to 125	°C
ESD sensitivity – HBM	$T_{J(max)}$	Too high a Tj could lead to electrical or thermal breakdown	165	°C
	T_{stg}		-50 to 160	°C
	-		6	kV

NOTE1. Human Body Model according to AEC-Q100-002 standard.

7 Electrical Operating Characteristics

valid through the full operating temperature range; unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Supply Voltage High-level	V_{CC}	Operating, $T_J < 165^{\circ}C$	4.5	-	24	V
Output Voltage Low-level	V_{OH}	$V_{CC}=24V$, $R_L=10k\Omega$, $B < B_B$	23.5	-	24	V
Output Voltage Supply	V_{OL}	$I_{OUTMAX}=25mA$, $B > B_{OP}$	0	-	0.5	V
Current	I_{CC}	$V_{CC}=24V$	-	4.0	8.0	mA
Output leakage Current	I_{OUTOFF}	$V_{OUT}=24V$, $B < B_{RP}$	-	-	10	μA
Power-On Time	t_{PO}		-	-	30	μs
Output-Rise Time	t_R	$V_{CC}=12V$, $R_L=1.2k\Omega$,	-	-	2	μs
Output-Fall Time	t_F	$C=12pF$, $V_{CC}=12V$,	-	-	2	μs

NOTE 1. Power-On Time, t_{PO} , is defined as: the time it takes for the output voltage to settle within $\pm 10\%$ of its steady state value under an applied magnetic field, after the power supply has reached its minimum specified operating voltage, V_{CC} (min).






8 Magnetic Operating Characteristics

valid through the full operating temperature range; unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Operating Point	B_{OP}	Operating, $T_J < 165^{\circ}C$	-	4.5	8.0	mT
Release Point	B_{RP}	$V_{CC}=24V$, $R_L=10k\Omega$, $B < B_B$	-8.0	-4.5	-	mT
Hysteresis	B_H	$I_{OUT}=25mA$, $B > B_{OP}$	-	9.0	-	mT

NOTE 1. The SOT-23-3L package is available in both s-pole and n-pole active forms, and customers can ask for samples according to the actual situation.


9 Characteristic Curves (Type UA)

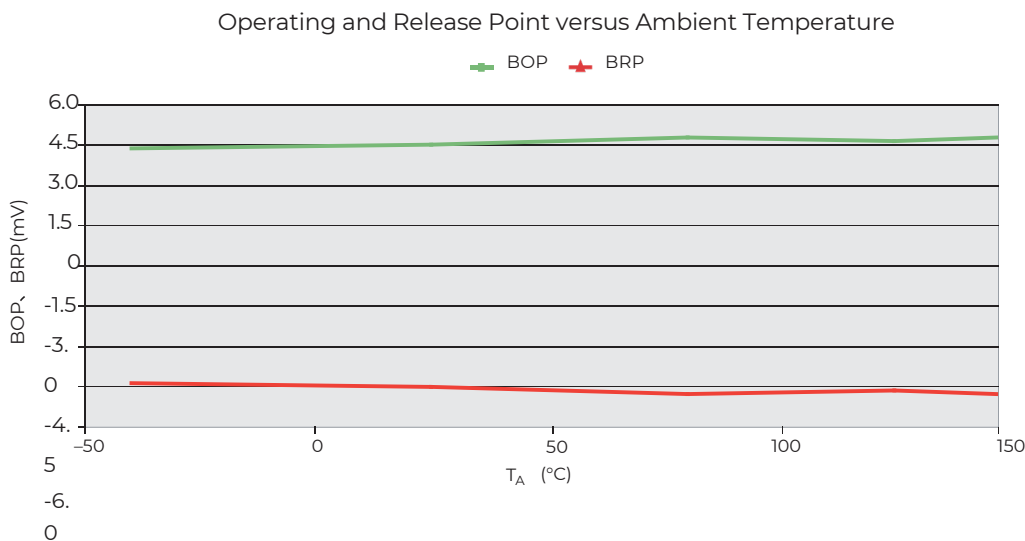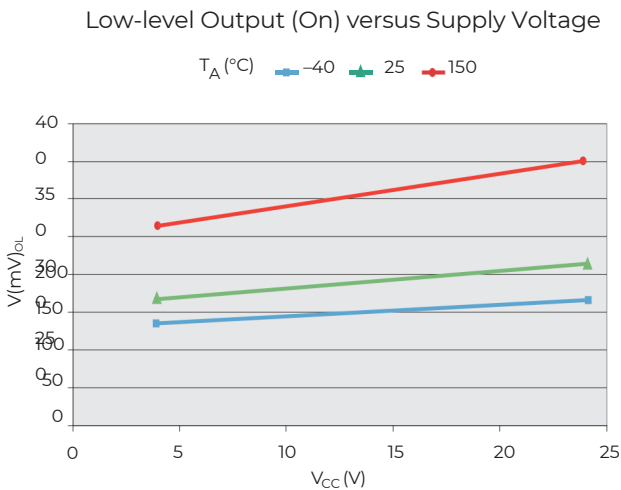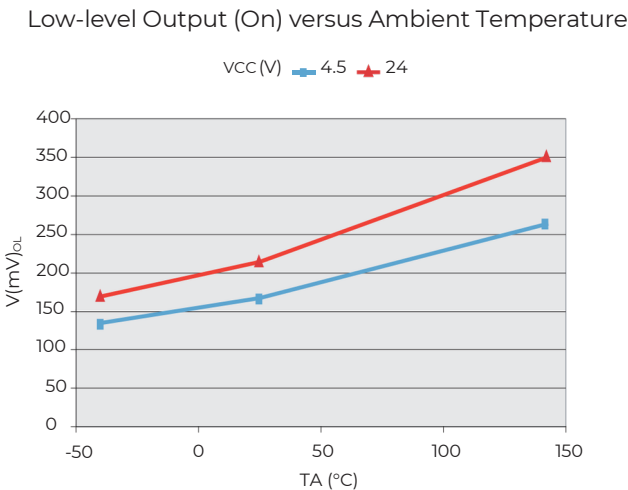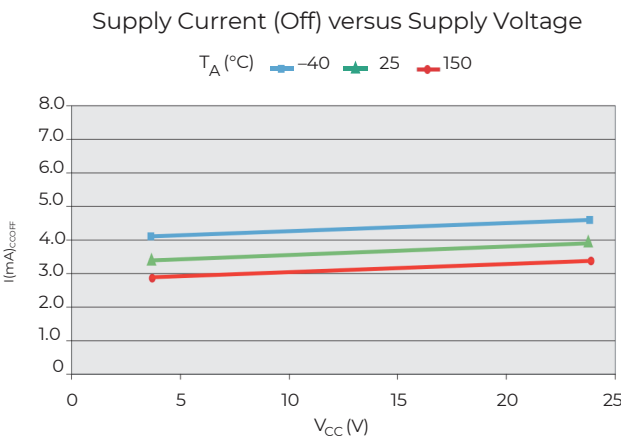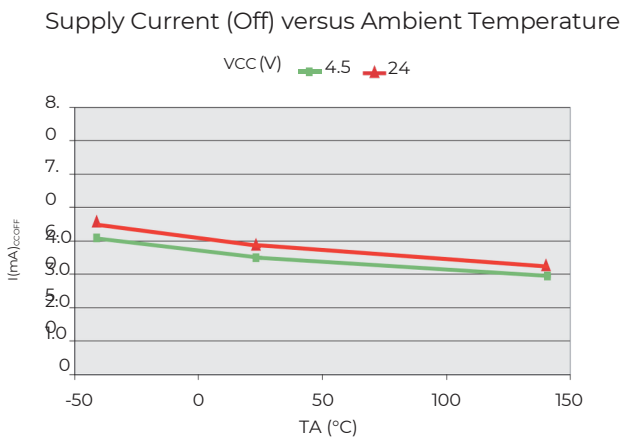

10 Magnetic Behavior

South Pole Active

When the S pole of the magnet faces the mark surface of the sensor and is close to it ($B \geq B_{OP}$), the sensor outputs a low level; when the N pole faces the mark surface and is close to it ($B \leq B_{RP}$), the sensor outputs a high level. When the magnet is far away from the sensor ($B=0$), the output status of the sensor is latched and remains unchanged. In order to change the output status, the applied magnetic field must be opposite polarity. The magnetoelectric conversion characteristics of PS1103041 are shown in the figure:

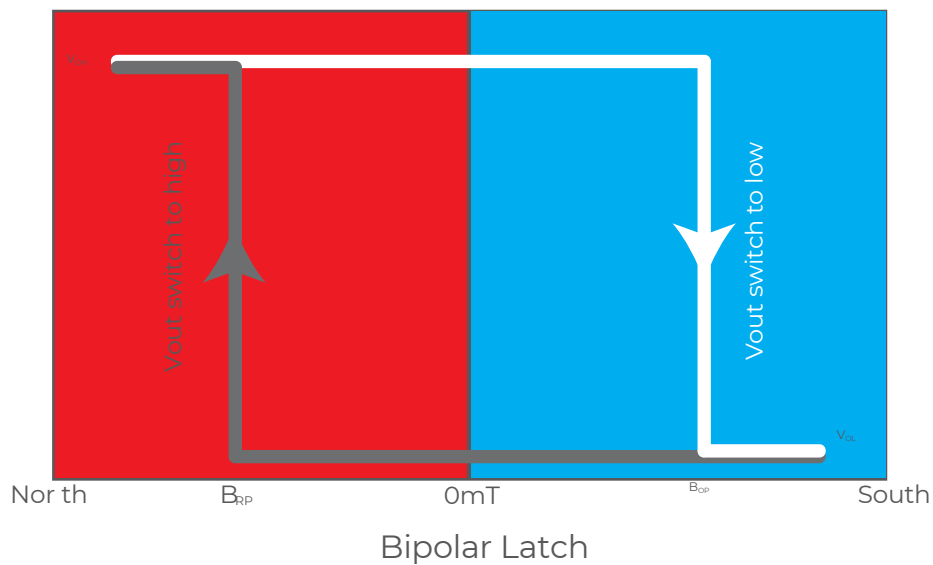


SOT-89
(Type S)



South Pole Active


TO92
(Type UA)





South Pole Active

North Pole Active

When the N pole of the magnet faces the mark surface of the sensor and is close to it ($|B| \geq |B_{OP}|$), the sensor outputs a low level; when the S pole faces the mark surface and is close to it ($|B| \geq |B_{RP}|$), the sensor outputs a high level. When the magnet is far away from the sensor ($B=0$), the output status of the sensor is latched and remains unchanged. In order to change the output status, the applied magnetic field must be opposite polarity. The magneto- electric conversion characteristics of PS1103041 are shown in the figure:

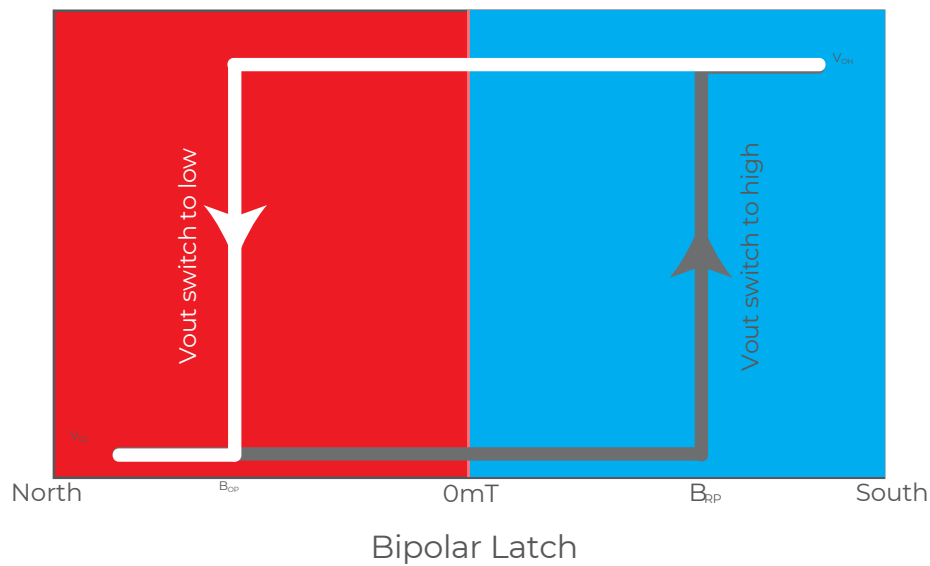


SOT-23-3L
(Type M)



North Pole Active


11 Package Information

SOT-23-3L

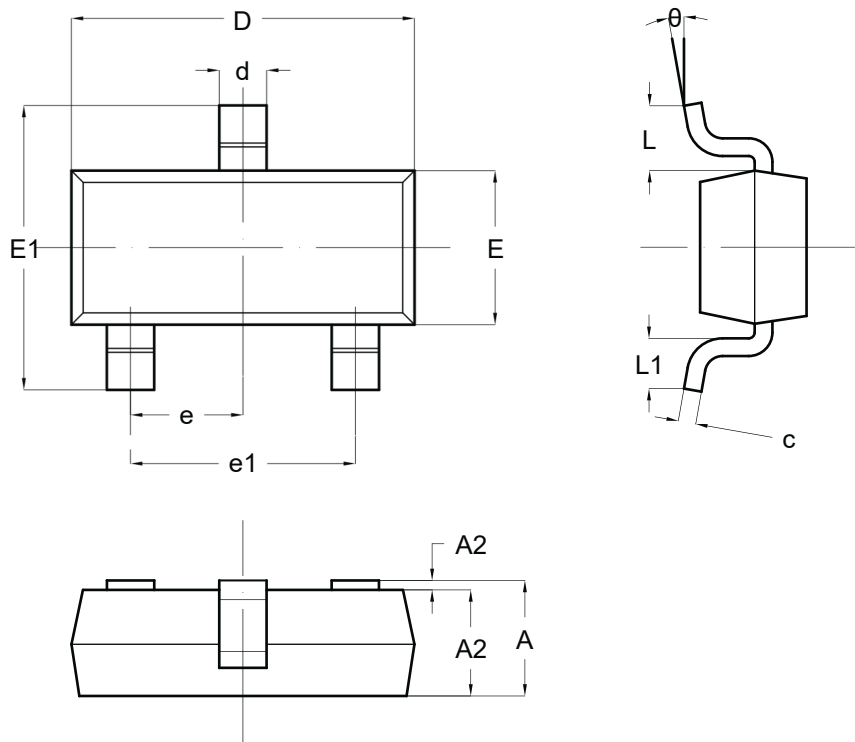


Symbol	Dimension (Unit: mm)	
	Min	Max
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950BSC.	
e1	1.800	2.000
L	0.550REF.	
L1	0.300	0.600
θ	0°	8°

SOT-89

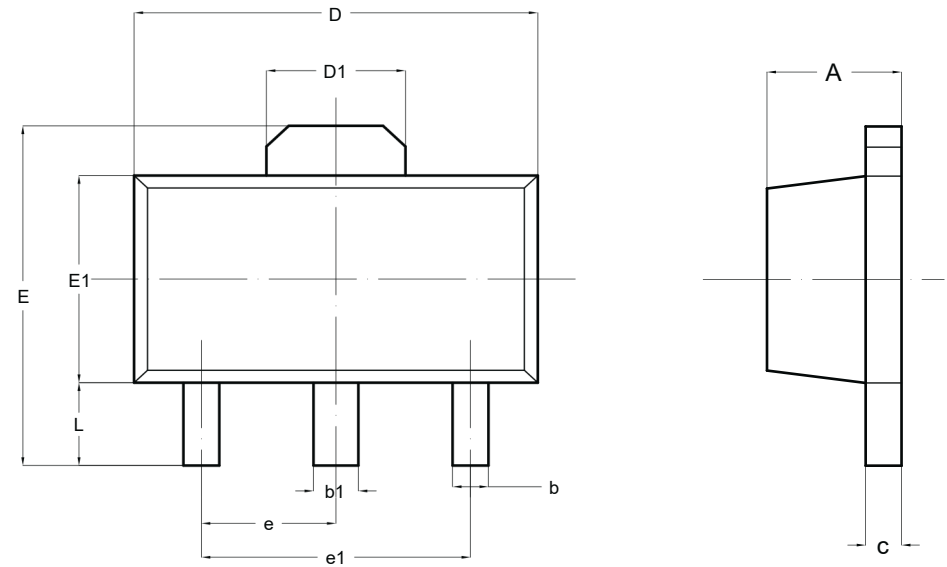


Symbol	Dimension (Unit: mm)	
	Min	Max
A	1.400	1.600
b	0.320	0.520
b1	0.380	0.580
c	0.350	0.440
D	4.400	4.600
D1	3.940	1.550REF. 4.250
E		
E1	2.300	2.600
e		1.500TYP.
e1		3.000TYP.
L	0.900	1.200

TO-92UA

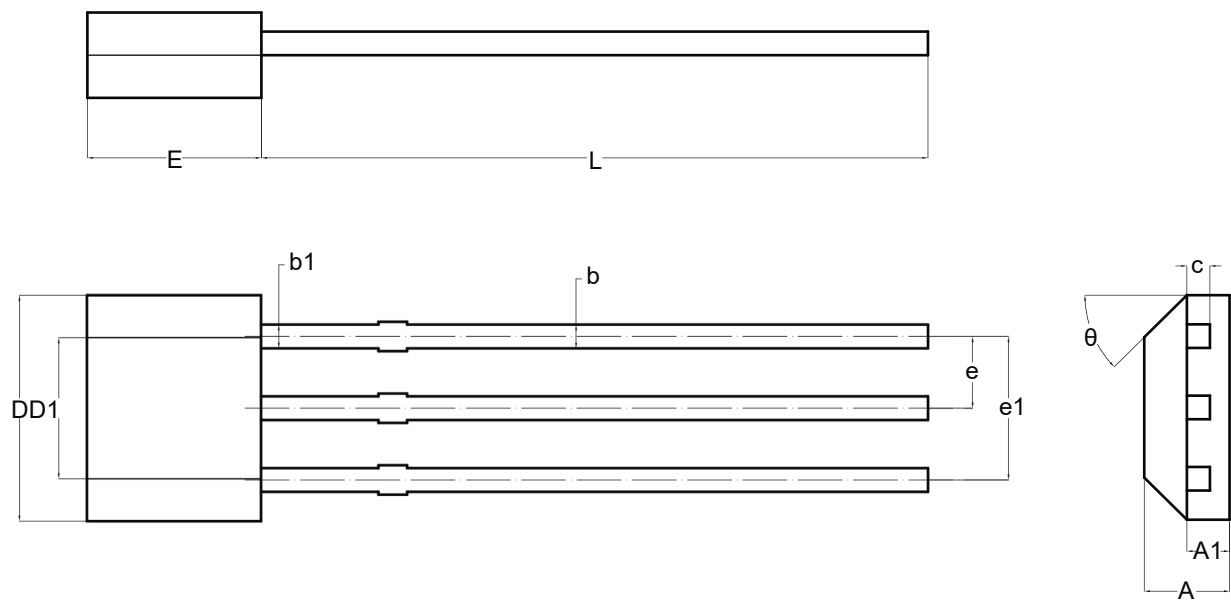

Symbol	Dimension (Unit: mm)	
	Min	Max
A	1.420	1.620
A1	0.660	0.860
b	0.330	0.480
b1	0.400	0.510
c	0.330	0.510
D	3.900	4.100
D1	2.280	2.680
E	3.050	3.250
e	2.440	1.270TYP. 2.640
e1	14.350	14.750
L		
θ	45°TYP.	

Ordering Information

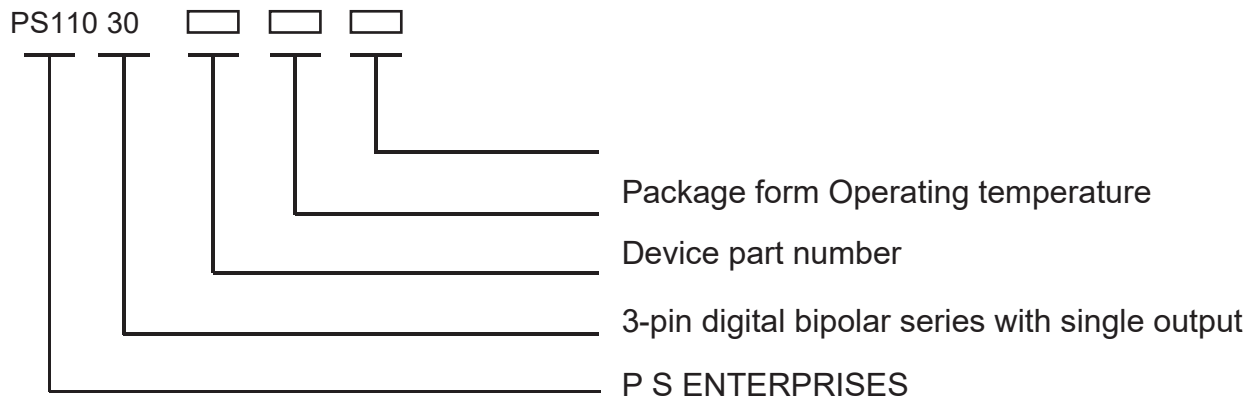

- Package Form:

M — SOT-23-3L (SMD)

S — SOT-89 (SMD)

UA — TO-92UA/TO-92S (SIP)

Note: M and S type are packed in reels, M 3k/reel, S 1k/reel;

UA type is packed in bags of 1k/bag or 0.5k/bag.

- Operating Temperature:

E — -40°C~+85°C

L — -40°C~+150°C

Copyright 2019 P S ENTERPRISES., P S ENTERPRISES., reserves the right to improve the performance, reliability or manufacturability of its products at any time according to detailed specifications. Before placing an order, the user is cautioned to verify that the information being relied upon is up-to-date. PSE's products are not to be used in any life support devices or systems (including but not limited to the listed devices or systems), in which a failure can reasonably be expected to cause bodily harm. The information included here in is believed to be accurate and reliable. However, P S ENTERPRISES., assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use. Learn more about our products for your application, please contact us:

info@psent.in